

LIFE SAFTY PLAN EXAMPLE


Contact Putnam County Fire Services at (386) 329 – 0464 for Additional Information.

LIFE SAFETY PLAN CHECK LIST

- Drawn to Scale.
- North Arrow.
- Complete Building Floor Plan.
- Interior Partitions Greater Than six ft. in Height.
- Labeled Rooms and Spaces.
- Total Occupant Load.
- Occupant Count for Each Space.
- Design Declaration.
- Fire Rated Construction.
- Occupancy Separation.
- Identified Fire Area.
- Exit Arrangement.
- Exit Capacity.
- Fire Department Connections.
- Type of Fire Suppression System.
- Fire Alarm Panels, Pull Stations, and Detection.
- Emergency Lighting.
- Exit Signs.
- Fire Extinguisher Locations.

LIFE SAFETY SITE PLAN

- Property Access.
- Power and Fuel Disconnects.
- Distance From Structure to Property Lines.
- Fire Department Connections.
- Light Weight Construction Placard Display.

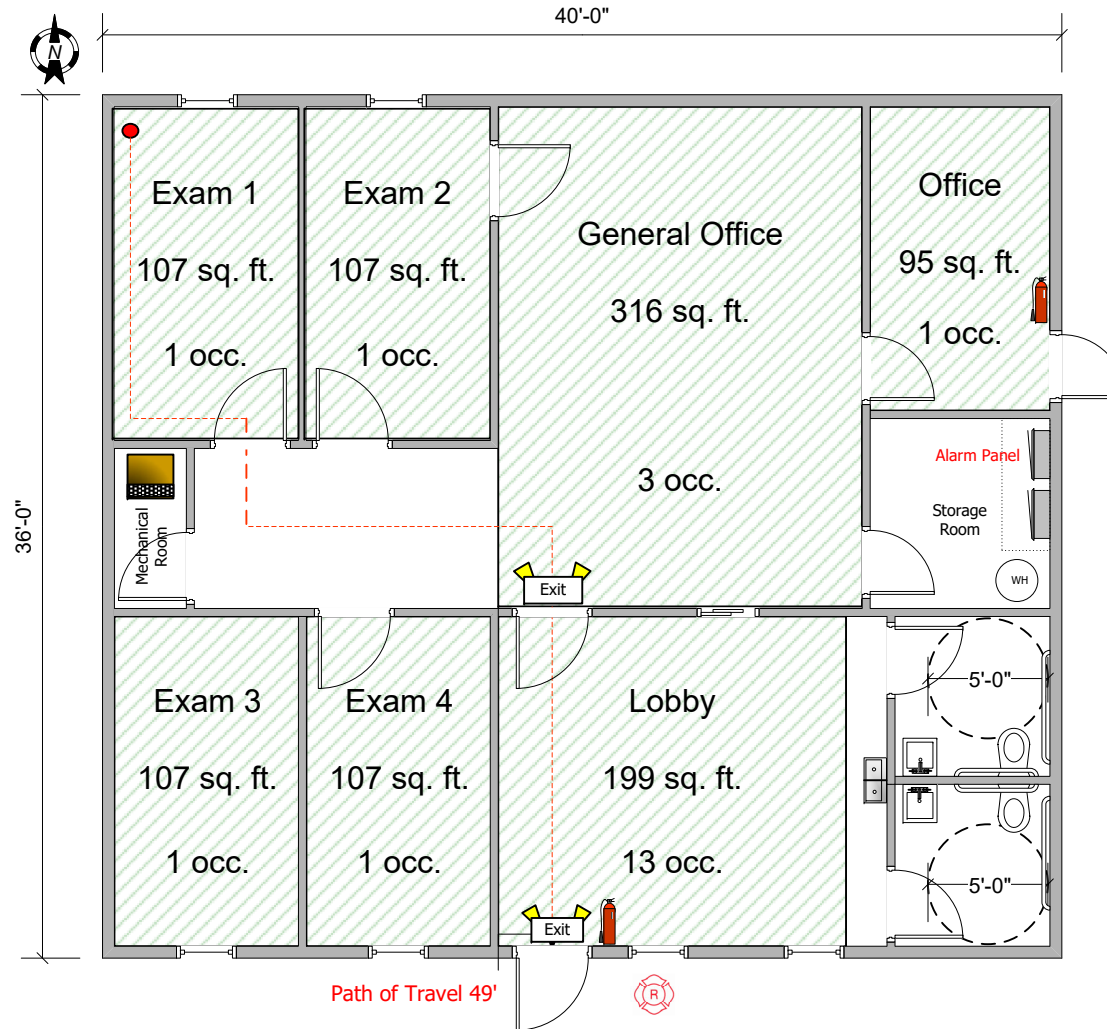

Example Design Statement:

Construction Type:	VB
Occupancy Type:	B
Fire Protected Construction:	No
Fire Suppression:	No
Occupant Count :	21
Single Exit:	Yes
Allowed path of Travel:	75'
Actual Path of Travel:	51'
Finish Classification:	C
Min. Door Opening Permitted:	32"
Actual Door Opening:	32"

Life Safety Plan Example

FULL FILENAME

G:\FORMS TO PRINT\A HANDOUT FOLDER\VISIO FILE MASTERS IN HERE\LIFE SAFETY EXAMPLE.VSD

Scale

1/8" = 1'